


One Way Cleanout

Note: One-way cleanouts shall be installed on maximum 400 foot centers along force main. Rotate vault as required to keep behind back of curb.

Two Way Cleanout

Note: Two-way cleanouts shall be installed on maximum 800 foot centers along force main. Rotate vault as required to keep behind back of curb.

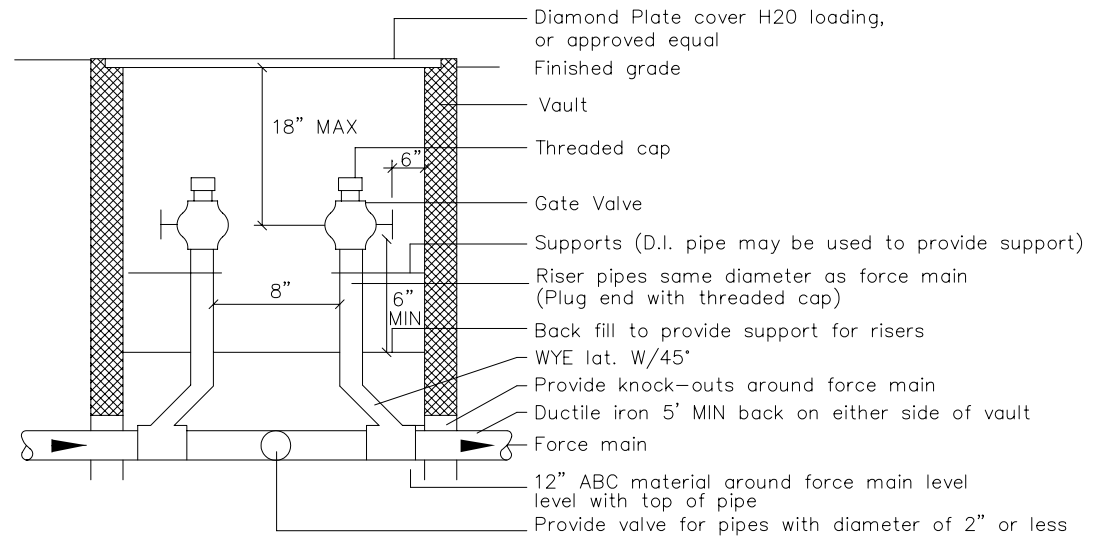

DETAIL NO.
G-3440

CITY OF GOODYEAR
STANDARD DETAIL

APPROVED BY:
Goodyear Standards and
Policies Committee 7/97

FORCE MAIN CLEANOUTS

DETAIL NO.
G-3440